

380

Indoor Contract and Installation Matting


# Swisslon Classic XT™




**380 Swisslon Classic XT™**




Anthracite (CH)

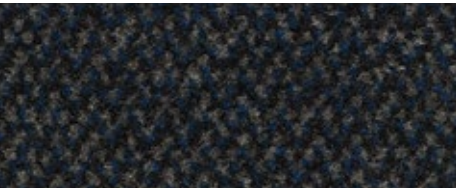

Cobalt (BU)

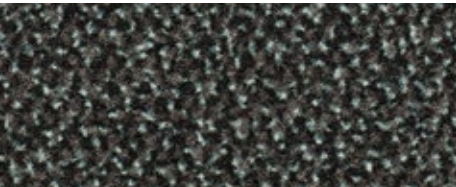

Granite (GT)

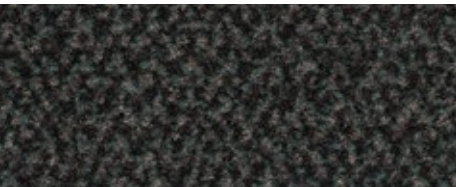

Slate Grey (GY)



Mocha (BR)



Premium quality barrier matting, designed to remove walked-in moisture and finer dirt particles in large indoor entrance areas, including wall-to-wall applications.

Our new classic barrier mat, known for its softer yarns, has been enhanced with a mono-filament to offer additional scraping and provide excellent cleaning and absorbing. The new tri-colour grit pattern provides outstanding dirt-hiding characteristics.

Great ability to retain moisture (>5.8 litres per m<sup>2</sup>) and scrape debris from foot traffic while maintaining its great looking appearance for the longest time. A dense heavyweight vinyl backing ensures longevity.

#### Recommended use:

- Suitable for heavy traffic conditions.
- For placement in recessed matwell frames (depth 7 mm) or wall-to-wall installations in larger entrances at hotels, public buildings, schools, universities, hospitals, department stores, banks, restaurants and on stairs.

#### Specifications:

- Densely tufted cut loop pile (81.000 tufts per m<sup>2</sup>) consisting of 100% polyamide 6 yarns.
- 850 grams of yarn per m<sup>2</sup>.
- Backing: black vinyl (DOP free).
- Vinyl borders: 2.5 cm on each side.
- Overall thickness: 9 mm.
- Weight: 3.6 kg per m<sup>2</sup>.
- Fire rating: EN 13501-1 Cfl-S1.

#### Recommended accessories:

- 083 Bevelled Nosing 2 mm

#### Full rolls:

- 135 cm x 20 meters
- 200 cm x 20 meters

#### Custom lengths:

- 135 cm per linear meter
- 200 cm per linear meter

#### Colours:

- Anthracite (CH)
- Cobalt (BU)
- Granite (GT)
- Slate Grey (GY)
- Mocha (BR)

#### Cleaning tip:

- Vacuum/shampooing or use injection/extraction method to clean.

Art. Nr.	Sizes	Weight kg
380R0051..	135 cm x 20 m	94,6
380C0051..	135 cm x lnm	4,7
380R0078..	200 cm x 20 m	145,6
380C0078..	200 cm x linm	7,3

Anthracite (CH), Slate Grey (GY), Granite (GT), Cobalt (BU), Mocha (BR)

## Product Testing

Water Retention

Crush Resistance

Dust Control

GOOD BETTER BEST SUPERIOR



## GENERAL DESCRIPTION

<b>Designation</b>	Dust Control Matting		
<b>Type</b>	Contract carpet		
<b>Description</b>	Absorbent carpet mat		
<b>Category</b>	Indoor absorbent - Contract		
<b>Recommended Use</b>	Indoor - heavy traffic conditions		
<b>Colours</b>	Anthracite (CH), Slate Grey (GY), Cobalt (BU), Granite (GT), Mocha (BR)		
<b>Dimensions</b>	<b>Standard Sizes</b>	<b>Full Rolls</b>	<b>Custom Lengths</b>
	N/A	135 cm x 20 m 200 cm x 20 m	135 cm x linm 200 cm x linm
<b>Special Remarks</b>	Widths are including vinyl borders of 2,5 cm on each side		
<b>Accessories</b>	083 Bevelled Nosing 2 mm		

## TECHNICAL SPECIFICATIONS

<b>Pile Material</b>	100% Polyamide
<b>Backing</b>	Black vinyl (DOP free)
<b>Primary Backing</b>	Nonwoven PET/PA
<b>Process</b>	Tufting
<b>Yarn Construction</b>	Velours cut loop pile
<b>Pile weight</b>	850 g/m <sup>2</sup>
<b>Total weight</b>	3.5 kg/m <sup>2</sup>
<b>Pile height</b>	7 mm
<b>Total height</b>	9 mm
<b>Pile density</b>	Awaiting results
<b>Number of tufts</b>	81,000

## TESTS

<b>Absorption Capacity</b>	TNO W6034	5,8 l/m <sup>2</sup>
<b>Fire Rating</b>	EN 13501	Cfl-S1
<b>Slip Resistance</b>	EN 13893	DS
<b>Static charge</b>	ISO 6356	< 0.1
<b>Comfort</b>	EN 1307	LC2
<b>Suitability for stairs</b>	EN 1963	Intensive use
<b>Suitability for castor chairs</b>	EN 985	Intensive use
<b>Dimensional stability</b>	ISO 2551	<0.4
<b>Light fastness</b>	ISO 105 B02	>6
<b>Water fastness</b>	ISO 105 B01	4
<b>Rubbing fastness</b>	ISO 105 X12	4
<b>Salt water</b>	ISO 105 E02	4
<b>Shampoo</b>	BS 1006	4
<b>Organic solvents</b>	ISO 105 X05	4
<b>Sustainability</b>	<ul style="list-style-type: none"> <li>• Recyclable material</li> <li>• REACH compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)</li> <li>• Contributes to cleaner environment by reducing need of cleaning chemicals</li> </ul>	