

Indoor / Outdoor Contract and Installation Next Generation

593

Master Flex™ C12




[www.notrax.eu](http://www.notrax.eu)




Indoor / Outdoor Contract and Installation Next Generation

593 Master Flex™ C12  
388 Swisslon Uni™ carpet insert

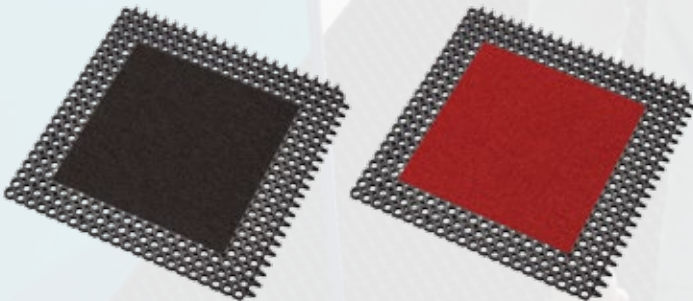


Charcoal (CH)

Red (RD)

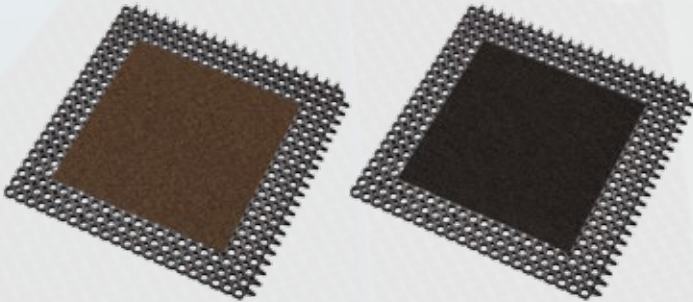


Taupe (TP)

Black (BL)

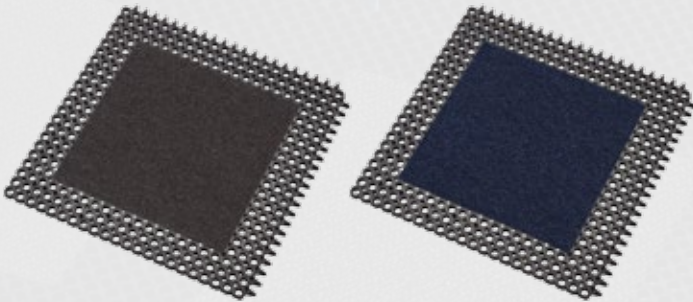

Grey (GY)

Blue (BU)



Brown (BR)

388 Swisslon Uni™  
carpet insert.

593

Indoor / Outdoor Contract and Installation Next Generation

Master Flex™ C12

Introducing the revolutionary modular multi-zone entrance mat tile. The new Master Flex™ design blends the functionalities of multi-zone entrance matting with the ease of on-site modular installation into an effective and ingenious matting solution. This full service matting system offers a smooth and harmonious transition from outdoor to indoor as well as from scraping to cleaning to drying.

Based on the unique design of the Oct-O-Flex™, the outdoor rubber mat scrapes shoes to stop dirt, grit and grime from entering the building with small drainage holes that are EU compliant for public entrances. Plus its smooth surface makes it suitable for wheeled access (carts, wheelchairs, suitcases, etc.). The quality carpet mat inserts allow a large variety of colours and customization possibilities to easily coordinate with the aesthetics of the building and interior design while providing excellent absorption of moisture to dry shoes and prevent slips and falls.

The Master Flex™ system offers all the benefits of a matting tile that is easily installed, rearranged or replaced. What makes it revolutionary is the interlocking system that creates a durable and seamless connection that can be effortlessly installed without glue. The 50 cm x 50 cm tiles cover sizeable areas easily and can be assembled on-site for installation in recessed matwell frames in large entrances. Made from a durable natural rubber compound that is inherently resilient, anti-slip and withstands the heaviest foot traffic. The mat has excellent adherence and adapts to any surface while the raised studs underneath allow water to drain through, keeping the surface clean and dry. Bevelled ramp accessories are available for loose lay installations to prevent tripping and facilitate access of wheelchairs and carts.

The 593 Master Flex™ C12 matting system can be completely personalized with a large selection of carpet inserts in a variety of colours.

- Recommended use:**
- Out- or indoor – heavy foot traffic areas.
  - For placement in interior or exterior recessed matwell frames.

- Specifications:**
- Tile: Natural rubber compound.
  - Octagonal ring design with open construction.
  - Suitable for use in extreme weather.
  - Small holes diameter 14 mm, compliant with EU norm for public entrances.
  - Overall thickness: 12 mm.
  - Weight: 2 kg/tile.

593 Master Flex™ C12 is available in a nitrile oil resistant or a fire retardant Bfl-S1 rubber compound on request.

- Recommended carpet inserts:**
- 103 Master Trax Lite™ carpet insert.
  - 380 Swisslon Classic XT carpet insert.
  - 388 Swisslon Uni™ carpet insert.

- Recommended accessories:**
- Attachable safety ramps for loose lay installations

- Stock sizes:**
- 50 cm x 50 cm modular tiles


- Custom sizes:**
- Any size – on demand, calculated per m².

- Cleaning tip:**
- Vacuum clean.

Art. Nr.	Sizes	Weight kg
593S0388..	50 cm x 50 cm with 388 Swisslon Uni™	2

388 Swisslon Uni™ carpet inserts:  
Charcoal (CH), Red (RD), Taupe (TP), Black (BL), Grey (GY), Blue (BU), Brown (BR)

Product Testing





## GENERAL DESCRIPTION

Designation	Dust Control Matting
Type	Contract carpet
Description	Absorbent carpet mat
Category	Indoor absorbent - Contract
Recommended Use	Indoor - heavy traffic conditions
Colours	Charcoal (CH)
Dimensions	<b>Standard Sizes</b>
	50 cm x 50 cm
Special Remarks	Widths are including vinyl borders of 2,5 cm on each side
Accessories	083 Bevelled Nosing 2 mm

## TECHNICAL SPECIFICATIONS

	Masterflex™ C12		Carpet insert 388 Swisslon Uni™
Material	Natural rubber	Pile Material	100% polyamide 6.6 yarns
Backing		Backing	PVC (DOP free)
Process	Compression Moulding	Primary Backing	Non-woven PET/PA
Weight	8 kg/m²	Process	Tufting
Overall thickness	12 mm	Yarn Construction	Cut loop pile - velours
		Pile weight	ISO 8543 900 g/m²
		Total weight	ISO 8543 3.5 kg/m²
		Pile height	ISO 1766 5 mm
		Overall thickness	ISO 1766 8.5 mm
		Pile density	ISO 8543
		Number of tufts	ISO 1763 73,340

## TESTS

	Masterflex™ C12		Carpet insert 388 Swisslon Uni™
Compression Deflection	1.4 kg/cm² 2.8 kg/cm²	Absorption Capacity	TNO W6034 5.5 l/m²
Foam Battery	ASTM D3574	Fire Rating	EN 13501 Cfl-S1
Abrasion Resistance	ASTM D3884-01 500 cycles: 1000 cycles:	Slip Resistance	EN 13893 DS
Static Coefficient of Friction	ASTM D412	Static charge	ISO 6356 <0.1
Elongation	ASTM D412	Comfort	EN 1307 LC4
Breaking Load	ASTM D412	Suitability for stairs	EN 1963 Intensive Use
Graves Tear Strength	ASTM D1004	Suitability for castor chairs	EN 985 Intensive Use
Hardness	ASTM D2240-02	Dimensional stability	ISO 2551
Anti-Slip	DIN 51130	Light fastness	ISO 105 B02 5
Fire Rating	EN 13501-1	Water fastness	ISO 105 B01 4
ESD	Rp: Rg:	Rubbing fastness	ISO 105 X12 4
Chemical Resistance		Salt water	ISO 105 E02 4
Temperature Range		Shampoo	BS 1006 4
Sustainability	Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)	Organic solvents	ISO 105 X05 4