
751 Rib'n'Roll™ 6 mm fine rib





- Fine rib rubber profile runner of 6 mm thickness.
- Matting with excellent wear and tear resistance. Used as flooring, shelve liners and in all kinds of industrial applications in workshops, near machines and any place where objects may tend to slide on workbenches, carts, cars or lorry booths. Withstand diluted acids and alkalis.

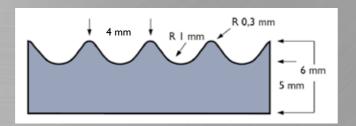

751 Rib'n'Roll™ 6 mm fine rib

	PRO	DUCT SPEC
Designation	Grooved Matting	
Туре	Flooring / runner	
Description	Corrugated fine rib pattern surface	
Material	Synthetic rubber	
Process	Calendering	
Category	Grooved pattern	
Recommended use	Factory and warehouse premises or any materials.	
Colours	Black	
Weight	8.1 kg/m ²	
Thickness	6 mm	
Standard sizes	100 cm x 10 m	
Custom sizes	N/A	
Special remarks	Per linear meter	
		PRODUCT T
	Tests	
Compression deflection	on	U.S.
	1.4 kg/cm ²	
	2.8 kg/cm ²	
Foam battery		ASTM D
Abrasion resistance		ASTM D
	500 Cycles	
	5000 Cycles	
Static coefficient of friction		ASTM C
Elongation		DIN5350
Breaking load		ASTM D
Tensile strength		DIN 535
Hardness		DIN 535
Anti-slip		DIN 511
		FIRE TES
	Critical radiant flux	ASTM E
	Fire retorden av	DIN4102
	Fire retardancy	EN 1350
	Flammability test	ASTM D
	Classification of the reaction to fire reaction	
ESD		ANSI ES 50% Hui
Sustainability		Rec Rea Res



CIFICATIONS

y kind of industrial applications to protect floors and

TESTING Norms Results 03574 03884-01 0.2% weight loss 21028-96 0,73 04 250% D412 504 3.5 MPA 505 60 Shore A 130 and BG-RULE BGR181 STING E-648 01-1 02859 M3 SD S7.1 imidity cyclable material ach Compliant (Registration, Evaluation, Authorization and

triction of Chemicals