


ACCZENT EXCELLENCE 70 RUBY



Nature - 3755 063



Nature



3755 046
3780 046



3755 065
3780 065




3755 042
3780 042



3755 043
3780 043



3755 044
3780 044



3755 045
3780 045



3755 049
3780 049



3755 050
3780 050



3755 051
3780 051



3755 052
3780 052



3755 063
3780 063



3755 053
3780 053



3755 064
3780 064




3755 059
3780 059



3755 060
3780 060




3755 056
3780 056




3755 057
3780 057



3755 058
3780 058




3755 054
3780 054




3755 055
3780 055

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Ruby
Classification		
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
UPEC Classification	UPEC Classification NF UPEC.A+ certificate (NF 189)	U4P3E2/3C2 307-308.1
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN430)	0.70mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
PU treatment	-	TopClean
Abrasion group	EN 660-2	Group T: ≤ 2mm ³
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	B _s S1 glued over any A2 _s or A1 _s substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6


The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.



3755 109
3780 109



3755 048
3780 048



3755 061
3780 061

ACCZENT EXCELLENCE 70 RUBY Nature

Main Product Features

- Resistance and a safety touch
- Excellent resistance to indentation and abrasion
- Superior anti slip resistance (R10)
- Available in 2 and 4 meter widths

Surface Treatment



Sustainability Tag



(1) Progressively for all our professional vinyl products during 2014

Logistics Information



Available in rolls:
2m & 4m
Rolls length: 231m

Laying direction:



General Information




According to European
Classification ISO 10874 (EN 685)



Play with the Room Designer

ACCZENT EXCELLENCE 70 RUBY

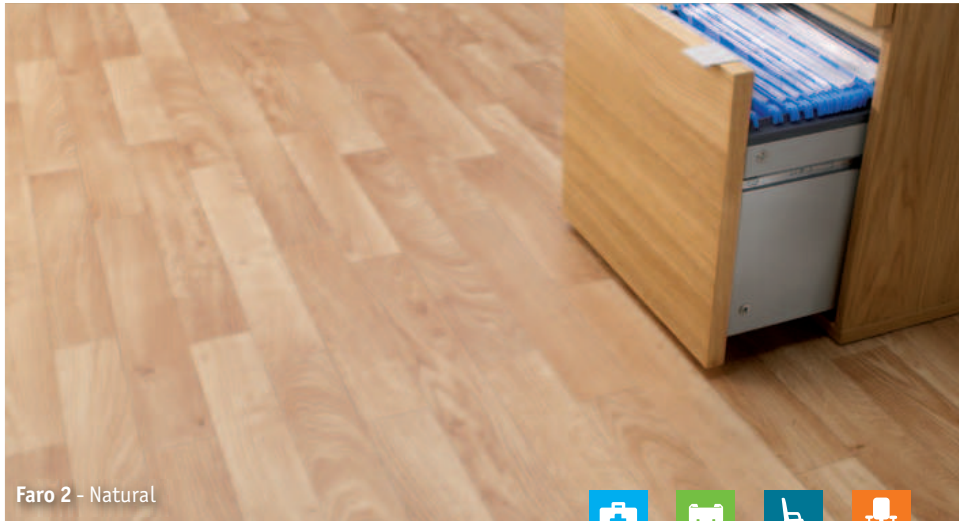

Beech Fayard



Light Natural

3755 029
3780 029

Beech



Natural

3755 030
3780 030

Trend Oak



White Beige

3755 031
3780 031


Sherwood



Natural Brown

3755 033
3780 033

Oak



Grey Beige

3755 035
3780 035

Antik Oak



Natural Grey

3755 037
3780 037


Domigo



Light

3755 038
3780 038


Walnut



Flat Brown


3755 039
3780 039

Maple



Dark

3755 040
3780 040



Red

3755 041
3780 041

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Ruby
Classification		
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
UPEC Classification	UPEC Classification NF UPEC.A+ certificate (NF 189)	U4P3E2/3C2 307-308.1
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN430)	0.70mm
Total weight	ISO 23997 (EN 430)	3 000g/m²
PU treatment	-	TopClean
Abrasion group	EN 660-2	Group T: ≤ 2mm³
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	B, S1 glued over any A2, or A1, substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.

Faro 2



Natural

3755 034
3780 034

ACCZENT EXCELLENCE 70 RUBY Wood

Main Product Features

- Resistance and a safety touch
- Excellent resistance to indentation and abrasion
- Superior anti slip resistance (R10)
- Available in 2 and 4 meter widths

Surface Treatment



Sustainability Tag



(1) Progressively for all our professional vinyl products during 2014

Logistics Information



Available in rolls:
2m & 4m
Rolls length: 231m

Laying direction:



Wood

General Information



According to European Classification ISO 10874 (EN 685)



Play with the Room Designer