


193 Brilliantstep™ Standard

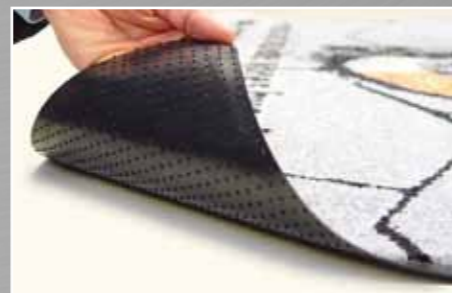

- This high quality multi-functional dust control mat not only cleans and dries shoes, to prevent dirt and moisture getting tracked in to facilities; it also provides an excellent opportunity to promote a brand or company name because most people primarily look to the floor.
- Superior colours fastness is ensured, in accordance with DIN54006.
- 16 standard PMS colours are offered, whereby any other colour can be matched.
- BrilliantStep™ offers a state-of-the-art technology that even allows 3-dimensional effects, fine lines and color shading, for each mat to have its truly individual image.
- Suitable for light traffic conditions.
- For placement inside entrances of hofices, shops, restaurants, grocery shops, bakeries, specialty stores.

193 Brilliantstep™ Standard

| PRODUCT SPECIFICATIONS | | | |
|--|--|--|---|
| Designation | Dust Control Matting | | |
| Description | Absorbent carpet mat with printed design | | |
| Material | | | |
| | Top | Tufted cut loop pile consisting of 100% non-crush polyamide 6.0 high twist yarn 405 grams of yarn per m ² | |
| | Backing | Vinyl backing with smooth finish. | |
| Process | Tufted | | |
| Category | Indoor absorbent | | |
| Recommended use | Indoor - light traffic conditions | | |
| Colours | Pallet of 16 attractive colours | | |
| Weight | 2.7 kg/m ² | | |
| Thickness | 6 mm | | |
| Standard sizes | 60 cm x 90 cm 90 cm x 120 cm 90 cm x 150 cm 90 cm x 300 cm 120 cm x 180 cm | | |
| Custom sizes | 90 cm per linear meter 120 cm per linear meter | | |
| Special remarks | | | |
| PRODUCT TESTING | | | |
| Tests | | Norms | Results |
| Abrasion resistance | | ASTM D3884 | |
| Colour fastness to light | | AATCC 16E | |
| Accelerated wear test by sim floor machine | | U.S. | |
| Accelerated soiling | | U.S. | |
| Anti-slip | | DIN51130 BGR181 | |
| Water retention | | U.S. | 3 l/m ² |
| Sanitary epidemiologic test | | GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV | Pass - Certificate no. 77.01.16.229.P.044984.07.09 |
| Graves tear strength | | | |
| Hardness | | | |
| Elongation | | | |
| FIRE TESTING | | | |
| Surface Flammability | | ASTM D2859 | Pass |
| Classification of the reaction to fire performance | | EN ISO 9239-1 | Efl - S1 |
| Sustainability | | <ul style="list-style-type: none"> • Recyclable material • REACH compliant (Registration, Evaluation, Authorization and restrictions of Chemicals) • Contributes to cleaner environment by reducing need of cleaning chemicals | |