


190 Brilliantstep™

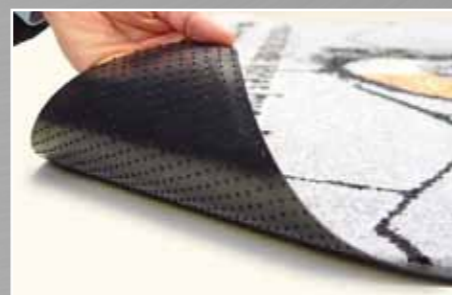

- This high quality multi-functional dust control mat not only cleans and dries shoes, to prevent dirt and moisture getting tracked in to facilities; it also provides an excellent opportunity to promote a brand or company name because most people primarily look to the floor.
- Superior colours fastness is ensured, in accordance with DIN54006.
- 16 standard PMS colours are offered, whereby any other colour can be matched.
- BrilliantStep™ offers a state-of-the-art technology that even allows 3-dimensional effects, fine lines and color shading, for each mat to have its truly individual image.
- Backing is oil/grease resistant.
- Spiked pattern minimizes movement on all surfaces and keeps mat elevated on hard floors to allow drying underneath.
- Suitable for medium traffic conditions.
- For placement inside entrances of hotels, shops, department stores, schools, universities, restaurants, supermarkets.
- Machine washable at 50° C or vacuum clean.

190 Brilliantstep™

PRODUCT SPECIFICATIONS		
Designation	Dust Control Matting	
Description	Absorbent carpet mat with printed design	
Material		
	Top	Tufted cut loop pile consisting of 100% non-crush polyamide 6.6 high twist yarn 700 grams of yarn per m ²
	Backing	Nitrile rubber, spiked pattern
Process	Tufted	
Category	Indoor absorbent - Washable	
Recommended use	Indoor - medium traffic conditions	
Colours	Pallet of 16 attractive colours	
Weight	2.6 kg/m ²	
Thickness	8.5 mm	
Standard sizes	60 cm x 85 cm 85 cm x 115 cm 85 cm x 150 cm 115 cm x 180 cm 115 cm x 240 cm 150 cm x 240 cm 150 cm x 300 cm	
Custom sizes	N/A	
Special remarks	Washable at 50° C	

PRODUCT TESTING		
Tests	Norms	Results
Abrasion resistance	ASTM D3884	
Colour fastness to light	AATCC 16E	
Accelerated wear test by sim floor machine	U.S.	
Accelerated soiling	U.S.	
Anti-slip	DIN51130 BGR181	
Water retention	U.S.	4 l/m ²
Sanitary epidemiologic test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.229.P.044984.07.09
Graves tear strength	ASTM D1004	40 N/mm
Hardness	ASTM D2240	70 Shore A
Elongation	ASTM D412	500%

FIRE TESTING			
	Surface Flammability	ASTM D2859	Pass
	Classification of the reaction to fire performance	EN ISO 9239-1	Bfl - S1
Sustainability	<ul style="list-style-type: none"> • Recyclable material • REACH compliant (Registration, Evaluation, Authorization and restrictions of Chemicals) • Contributes to cleaner environment by reducing need of cleaning chemicals 		

